

10/27/00

10-30-00

A

10/27/00 U.S. PTO

Please type a plus sign (+) inside this box → +

PTO/SB/05 (08-00)

Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	8002A-29
First Inventor	Lavelle et al.
Title	Vehicle Display Device...
Express Mail Label No.	EL599449533US

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☐ Applicant claims small entity status.  
See 37 CFR 1.27.
3. ☒ Specification [Total Pages **33**]  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross Reference to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to sequence listing, a table, or a computer program listing appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **4**]
5. ☐ Oath or Declaration [Total Pages **2**]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63 (d))  
(for continuation/divisional with Box 17 completed)
    - i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

**ADDRESS TO:** Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or  
Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Form (CRF)
  - b. Specification Sequence Listing on:
    - i. ☐ CD-ROM or CD-R (2 copies); or
    - ii. ☐ paper
  - c. ☐ Statements verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

9. ☒ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☒ Power of  
(when there is an assignee) Attorney
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☒ Other: Checks for \$40.00  
and \$818.00

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_ / \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit \_\_\_\_\_

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**18. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name	Frank Chau, Esq.				
Address	F. CHAU & ASSOCIATES, LLP				
	1900 Hempstead Turnpike, Suite 501				
City	East Meadow	State	New York	Zip Code	11554
Country	USA	Telephone	516-357-0091	Fax	516-357-0092

Name (Print/Type)	Frank Chau	Registration No. (Attorney/Agent)	34,136
Signature			Date 10/27/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL  
for FY 2001**

Patent fees are subject to annual revision.

**Complete if Known****TOTAL AMOUNT OF PAYMENT** (\$ 858.00)

Application Number	
Filing Date	October 27, 2000
First Named Inventor	Lavelle et al.
Examiner Name	
Group Art Unit	
Attorney Docket No.	8002A-29

**METHOD OF PAYMENT**

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:
- Deposit Account Number: 50-0679
- Deposit Account Name: F. Chau & Associates, LLP
- ☐ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
- ☐ Applicant claims small entity status See 37 CFR 1.27
2. ☒ Payment Enclosed:
- ☒ Check ☐ Credit card ☐ Money Order ☐ Other

**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity Code (\$)	Small Entity Code (\$)	Fee Description	Fee Paid
101 710	201 355	Utility filing fee	710
106 320	206 160	Design filing fee	
107 490	207 245	Plant filing fee	
108 710	208 355	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$ 710.00)

**2. EXTRA CLAIM FEES**

Total Claims	Extra Claims	Fee from below	Fee Paid
26	-20** = 6	18	108
3	-3** = 0	80	0
Multiple Dependent		270	

Large Entity Code (\$)	Small Entity Code (\$)	Fee Description	Fee Paid
103 18	203 9	Claims in excess of 20	
102 80	202 40	Independent claims in excess of 3	
104 270	204 135	Multiple dependent claim, if not paid	
109 80	209 40	** Reissue independent claims over original patent	
110 18	210 9	** Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2) (\$ 108.00)

\*\*or number previously paid, if greater; For Reissues, see above

**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Entity Code (\$)	Small Entity Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for <i>ex parte</i> reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 390	216 195	Extension for reply within second month	
117 890	217 445	Extension for reply within third month	
118 1,390	218 695	Extension for reply within fourth month	
128 1,890	228 945	Extension for reply within fifth month	
119 310	219 155	Notice of Appeal	
120 310	220 155	Filing a brief in support of an appeal	
121 270	221 135	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,240	241 620	Petition to revive - unintentional	
142 1,240	242 620	Utility issue fee (or reissue)	
143 440	243 220	Design issue fee	
144 600	244 300	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	40.00
146 710	246 355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 710	249 355	For each additional invention to be examined (37 CFR § 1.129(b))	
179 710	279 355	Request for Continued Examination (RCE)	
169 900	169 900	Request for expedited examination of a design application	

Other fee (specify) \_\_\_\_\_

\* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$ 40.00)

**SUBMITTED BY**

Name (Print/Type)	Frank Chau	Registration No. (Attorney/Agent)	34,136	Telephone	(516) 357-0091
Signature		Date	10/27/00		

**WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

## VEHICLE DISPLAY DEVICE HAVING A WIRELESS TRANSMITTER

### 1. Technical Field

5           The present invention relates generally to vehicles and, in particular, to a display device for a vehicle. The display device mounts at a rear portion of a vehicle seat, with audio being supplied to the vehicle passengers by a wireless transmitter included in the display device. The  
10 passengers receive the transmitted audio through wireless headphones.

### 2. Background Description

15           As cars have been continuously updated to include new and useful features for the enjoyment and/or utility of a driver and his or her passengers, devices generally found in the home have made their way into cars as optional features. Such features include the television, the video cassette player (VCP), the compact disk (CD) player, and the digital  
20 video disk (DVD) player. These features undoubtedly provide enjoyment and/or utility to the driver and/or passengers of a vehicle. For example, children may become occupied by, for example, watching a moving and, thus, may leave the driver better able to concentrate on operating the vehicle.

Moreover, passengers in a vehicle undertaking a long journey may better pass the time by viewing a movie.

However, it has generally been the case that the viewing of a movie in a vehicle includes the playing of any corresponding audio on the vehicle's existing sound system or on a sound system of the reproducing device (e.g., integrated television/video cassette player). Such an arrangement may interrupt those passengers who wish to have a quiet environment, such as those passengers intending to, for example, read or sleep during the trip.

Accordingly, there is a need for vehicle display device which provides an audio output to only those passengers intent on receiving the same.

#### SUMMARY OF THE INVENTION

The problems stated above, as well as other related problems of the prior art, are solved by the present invention, a display device for a vehicle. The display device mounts at a rear portion of a vehicle seat, with audio being supplied to the vehicle passengers by a wireless transmitter included in the display device. The passengers receive the transmitted audio through wireless headphones.

According to a first aspect of the invention, there is

provided a display device for a vehicle having a seat. The display device includes an assembly housing adapted to mount at a rear portion of the seat. A receiver is adapted to receive at least one of video and audio signals from at least one external input device. At least one wireless transmitter operatively coupled to said receiver, is adapted to wirelessly transmit the audio signals to at least one wireless headphone set. The display device is adapted to reproduce the video signals.

According to a second aspect of the invention, the wireless signals are at least one of radio frequency and infrared signals.

According to a third aspect of the invention, the receiver receives an input signal from an external media source.

According to a fourth aspect of the invention, the external media source includes at least one of a television tuner, a video cassette player (VCP), a compact disk (CD) player, a digital video disk (DVD) player, an AM/FM radio, a video game player, global navigation data, and e-mail.

According to a fifth aspect of the invention, the display device further includes signal processing facilities adapted to perform at least one of signal processing and

signal conversion, with respect to at least one of the audio signals and the video signals.

According to a sixth aspect of the invention, the signal processing facilities are adapted to perform at least one of digital signal processing, encoding, decoding, encrypting, decrypting, compressing, decompressing, analog-to-digital conversion (ADC), digital-to-analog conversion (DAC), and error correction.

According to a seventh aspect of the invention, the display device employs one of a liquid crystal display (LCD), light emitting diodes (LEDs), and a gas plasma.

According to an eighth aspect of the invention, the liquid crystal display is based upon one of active matrix technology and passive matrix technology.

According to a ninth aspect of the invention, the display device employs touch screen technology.

According to a tenth aspect of the invention, the display device includes one of picture-in-picture and split screen capability.

According to an eleventh aspect of the invention, the at least one wireless transmitter includes at least one multiplexor adapted to select a specific input device whose audio output is to be wirelessly transmitted to the at least

one wireless headphone set.

According to a twelfth aspect of the invention, the at least one wireless transmitter is adapted to wirelessly transmit the audio signals to the at least one wireless  
5 headphone set as a left audio channel and a right audio channel.

According to a thirteenth aspect of the invention, the left audio channel and the right audio channel correspond to different frequencies.

10 According to a fourteenth aspect of the invention, the at least one wireless headphone set includes a plurality of wireless headphone sets and the at least one wireless transmitter is adapted to wirelessly transmit the audio  
15 signals to each of the plurality of wireless headphone sets as a left audio channel and a right audio channel. Each of the channels have a different frequency for each of the plurality of wireless headphone sets.

According to a fifteenth aspect of the invention, the bus includes a video bus and an audio bus.

20 According to a sixteenth aspect of the invention, the video bus is coupled to the display device and the audio bus is coupled to the at least one wireless transmitter.

According to a seventeenth aspect of the invention, the

at least one wireless transmitter includes an optical transmitting device and the at least one wireless headphone set includes a photosensitive device.

According to an eighteenth aspect of the invention, the at least one wireless transmitter and the at least one wireless headphone set include an antenna.

According to a nineteenth aspect of the invention, the at least one wireless headphone set includes a digital-to-analog converter.

These and other aspects, features and advantages of the present invention will become apparent from the following detailed description of preferred embodiments, which is to be read in connection with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a block diagram illustrating the elements of a display device for a vehicle according to an illustrative embodiment of the invention;

FIG. 1B is a block diagram illustrating the elements of a display device for a vehicle according to another illustrative embodiment of the invention;

FIG. 2 is a diagram illustrating a wireless transmitter interacting with a wireless headphone set based on optical



and/or RF transmission, according to an illustrative embodiment of the invention; and

FIG. 3 is a block diagram illustrating a display device for a vehicle according to an illustrative embodiment of the invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

It is to be understood that the present invention may be implemented in various forms of hardware, software, firmware, special purpose processors, or a combination thereof. Preferably, the present invention is implemented as a combination of both hardware and software, the software being an application program tangibly embodied on a program storage device. The application program may be uploaded to, and executed by, a machine comprising any suitable architecture. The machine may be implemented on a computer platform having hardware such as one or more central processing units (CPU), a random access memory (RAM), and input/output (I/O) interface(s). The computer platform may also include an operating system and microinstruction code. The various processes and functions described herein may either be part of the microinstruction code or part of the application program (or a combination thereof) which is

executed via the operating system. In addition, various other peripheral devices may be connected to the computer platform such as an additional data storage device.

It is to be further understood that, because some of the constituent system components depicted in the accompanying Figures may be implemented in software, the actual connections between the system components may differ depending upon the manner in which the present invention is programmed. Given the teachings herein, one of ordinary skill in the related art will be able to contemplate these and similar implementations or configurations of the present invention.

To facilitate a clear understanding of the present invention, a brief description of the invention will now be given, followed by a more detailed description with respect to FIGs. 1-3. As noted above, the invention is directed to a display device for a vehicle. The display device mounts at a rear portion of a vehicle seat, with audio being supplied to the vehicle passengers by a wireless transmitter included in the display device. The passengers receive the transmitted audio through wireless headphones. Thus, only passengers desiring to receive the audio are provided with the same through the wireless headphones. Passengers

desiring a quiet environment are not disrupted by the reproduction of the audio. As is known to one of ordinary skill in the related art, the wireless headphones will include a wireless receiver for receiving the wireless signals transmitted by the wireless transmitter of the display device.

It is to be appreciated that the display device of the invention may include more than one wireless transmitter. In such a case, different listeners may simultaneously listen to different audio outputs. For example, if a video cassette player (VCP) and a compact disk (CD) player are coupled to the display device through an included interface, then one vehicle passenger may listen to the audio output corresponding to the VCP while another vehicle passenger may listen to the audio output corresponding to the CD player. Thus, the display device need not be coupled to external devices that include a video output. Further, since the display device of the invention may include picture-in-picture capability, two vehicle passengers may simultaneously watch and listen to two different movies.

It is to be appreciated that the wireless signals can be any type of wireless signal including, but not limited to, radio frequency and infrared signals. It is to be noted

that the current transmission capability (bandwidth) of infrared signals is approximately 1.5 to 2.0 Mbits/sec, with a maximum projected bandwidth of 16Mbits/sec.

FIG. 1A is a block diagram illustrating the elements of a display device 112 for a vehicle according to an illustrative embodiment of the invention. The display device 112 mounts at a rear portion of a vehicle seat. The display device 112 includes a first wireless transmitter 128, a second wireless transmitter 130, a receiver 125, facilities for performing signal processing and/or signal conversion 127 (hereinafter "signal processing/conversion facilities"), and a display 192 (e.g., screen and rendering portion). The display device 112 is intended to interface with at least one of the following through the receiver 125: a TV tuner 114, a video cassette player (VCP) 116, a digital video disk (DVD) player 118, a compact disk (CD) player 120, an amplitude modulation/frequency modulation (AM/FM) radio 122, a video game player 126, and so forth.

The TV tuner 114, the VCP 116, the DVD player 118, the CD player 120, the AM/FM radio 122, and the video game player 126 may also be collectively referred to herein as input devices 190. It is to be appreciated that the devices described above with respect to the input devices 190 are

merely illustrative and, thus, other devices may also be employed in accordance with the invention, while maintaining the spirit and scope thereof.

The receiver 125 may include a bus for receiving audio and video signals. Moreover, the receiver 125 may include separate buses for receiving the audio and video signals.

The first wireless transmitter 128 and the second wireless transmitter 130 each have multiplexing capabilities to enable the selection of a particular device (e.g., one of the input devices 190) whose audio signal is to be wirelessly transmitted. Selection is made through a SELECT (SEL) input. Of course, wireless transmitters without such multiplexing capabilities may also be used; however, in such a case, a separate multiplexor(s) would be coupled between such transmitters and the audio outputs of the input devices 190.

The elements of the display device 112 are intended to interact with a first wireless headphone set 152 and a second wireless headphone set 154. It is to be appreciated that while the illustrative embodiment of FIG. 1A is shown with two wireless headphone sets (i.e., 152, 154), the invention is not so limited and, thus, any number of wireless headphone sets may be used in conjunction with the

invention. For example, one or more headphones may be used (e.g., one wireless headphone set for each passenger).

The first wireless transmitter 128 and the second wireless transmitter 130 transmit wireless signals to the first wireless headphone set 152 and the second wireless headphone set 154, respectively. Of course, other configurations are possible which maintain the spirit and scope of the invention, as readily contemplated by one of ordinary skill in the related art.

An antenna 136 may be located within or external to the vehicle. For example, antenna 136 may be the original antenna included in the vehicle, which is typically used to receive frequencies associated with AM/FM radio stations and television stations. Such an antenna is typically located in the windshield or protruding from the exterior of the vehicle. Moreover, the antenna 136 may be a special purpose antenna, capability of receiving frequencies corresponding to, for example, satellite communications from a satellite or satellite network. The satellite communications may include movies and other media types (e.g., music, global navigation data, e-mail, and so forth). Of course, the antenna 136 may receive various media types (including those mentioned above) from other types of transmission networks

(e.g., land-based). In any event, the antenna 136 is coupled to the display device 112 through the receiver 125.

It is to be appreciated that the display device 112 is not limited to any particular kind of display device.

5 Accordingly, display devices may be used which include, but are not limited to, liquid crystal displays (LCDs), light emitting diodes (LEDs), and gas plasma. It is to further appreciated that any variations of the aforementioned types of displays may be used. For example, with respect to  
10 liquid crystal displays, active matrix (e.g., thin film transistor) technology or passive matrix (e.g., dual scan) technology may be employed. The display device 112 may also employ touch screen technology, so that users can interact with the console by either touching the screen or placing a  
15 specified device (e.g., electrostatic pen) near the screen. In a preferred embodiment of the invention, a liquid crystal display is employed which uses active matrix technology.

In the case when display device 112 includes picture-in-picture or split screen capability, two or more different  
20 input devices 190 (e.g., the DVD player 118 and the TV tuner 114) may be input to the display device 112 through the receiver 125. In such a case, additional multiplexors (not shown) may be employed to determine which display window is

to reproduce a particular video signal from a plurality of video signals. Given the teachings of the invention provided herein, one of ordinary skill in the related art will contemplate these and various other variations and configurations of the elements of the invention, while  
5 maintaining the spirit and the scope thereof.

The signal processing/conversion facilities 127, which is operatively coupled to the receiver 125, may perform such processing/conversion prior to any video signals being  
10 provided to the display device 112 and any audio signals being provided to the wireless transmitters 128 and 130. Of course, other arrangements are possible, including having separate signal processing/conversion facilities for the video signals and the audio signals.

15 The signal processing/conversion facilities 127 provides the audio signals input to the receiver 125 to the wireless transmitters 128, 130, and provides the video signals input to the receiver 125 to the display (e.g., screen and rendering portion).

20 The signal processing/conversion facilities 127 may include, but are not limited to, Digital Signal Processors (DSPs), and facilities for performing encoding/decoding, encrypting/decrypting, compressing/decompressing, analog-to-



digital conversion (ADC), digital-to-analog conversion (DAC), error correction, and filtering. Such error correction may include, but is not limited to, Cyclic Redundancy Checking (CRC), Error Correction Code or Error Checking and Correcting (ECC), checksum, and so forth. With respect to, for example, encoding/decoding, encrypting/decrypting, and compressing/decompressing, the former of each pair may be performed by any of the input devices and the latter is performed by the signal processing/conversion facilities 127.

It is to be noted that the wireless signals may be encoded to prevent interference between the two wireless headphone sets 152, 154. Such encoding may be based on technologies such as, for example, spread spectrum technology.

In many cases, the facilities described above may be implemented by one or more codecs. In other cases, additional and/or other circuitry may be required. It is to be appreciated that one of ordinary skill in the related art will contemplate these and various other facilities for performing signal processing and/or signal conversion, while maintaining the spirit and scope of the invention.

FIG. 1B is a block diagram illustrating the elements of

a display device 512 for a vehicle according to another illustrative embodiment of the invention.

The display device 512 includes a wireless transmitter 510, a receiver 125, signal processing/conversion facilities 127, and a display 192 (e.g., screen and rendering portion). The display device 112 is intended to interface with the input devices 190.

Similar to the display device 112 of FIG. 1A, the display device 512 of FIG. 1B is intended to interact with a plurality of wireless headphone sets. For illustrative purposes, the first wireless headphone set 152 and the second wireless headphone set 154 are shown.

It is to be appreciated that the main difference between the display device 112 of FIG. 1A and the display device 512 of FIG. 1B is that the first and the second wireless transmitters 128, 130 have been replaced by the wireless transmitter 510 of FIG. 1B, the latter for wirelessly transmitting the audio signals (hereinafter also referred to as "audio programs", with each input device outputting a particular audio program) based upon Code-Division Multiple Access (CDMA) technology. The coding and other related operations may be performed by the wireless transmitter 510 and/or by the signal processing/conversion

facilities 127. In any event, the requisite circuitry for implementing CDMA technology would be required both on the transmission end (the display device) and the receiving end (the wireless headphone sets). Such circuitry may include, for example, convolutional encoders, Walsh code generators and PN (pseudo random number) sequence generators, combiners, modulators, de-modulators, correlators, digital-to-analog converters (DACs), analog-to-digital converters (ADCs), and so forth. Given the teachings of the invention provided herein, one of ordinary skill in the related art will readily contemplate the elements required to implement CDMA in a display device according to the invention, while maintaining the spirit and scope thereof.

It is to be appreciated that the use of CDMA technology enables a single transmitter (i.e., wireless transmitter 510) to transmit all programs simultaneously, with a user being able to select the program he or she intends to hear via a selector located on, for example, his or her wireless headphone set. Moreover, the use of CDMA technology enables all of the available frequency bandwidth to be used, while simultaneously minimizing interference.

According to one illustrative embodiment of the invention, the audio programs may be pre-stored in a memory

system such that pre-specified memory locations are used to store specific audio programs (i.e., a pre-defined mapping). Of course, a dynamic mapping approach may also be employed. In either case, a memory addressing scheme may be used to write the programs into memory and read them therefrom. A processor and governing program or operating system may be employed to control the memory operations. The processor, governing program or operating system, and memory system may be implemented as part of the signal processing/conversion facilities 127, the wireless transmitter 510, a combination thereof, or separately as independent elements of the display device 512. Of course, other arrangements are possible and readily contemplated by one of ordinary skill in the art.

It is to be appreciated that the audio programs need not be stored but may be directly processed by, e.g., the signal processing/conversion facilities 127 and/or the wireless transmitter 510 in real-time (or with slight delay) for the purposes of transmitting in CDMA format. Given the teachings of the invention provided herein, one of ordinary skill in the related art will contemplate these and various other arrangements for implementing the invention, while maintaining the spirit and scope thereof.

In the illustrative embodiment of FIG. 1B, the wireless signals (audio programs) are shown transmitted in two distinct ways. In the first approach 550, the left and right audio channels of each of the plurality of audio programs are transmitted as separate streams. In the second approach 560, the left and right audio channels of each of the plurality of audio programs are combined onto a single stream. In the latter case, separation of the channels is performed in the wireless headphone sets. In any event, the plurality of audio programs are then combined, superimposed onto a carrier frequency, and transmitted by the wireless transmitter 510 for receipt by the wireless headphone sets. These and various other ways in which to transmit a plurality of audio programs to a plurality of wireless headphones sets may be readily contemplated and implemented by those of ordinary skill in the art, while maintaining the spirit and scope of the invention.

FIG. 2 is a diagram illustrating the wireless transmitter 128 interacting with the wireless headphone set 152 based on optical and/or RF transmission, according to an illustrative embodiment of the invention. It is to be appreciated that the following description is also applicable to the wireless transmitters 130 and/or 510. The

wireless transmitter 128 includes an optical transmitting device 212 (e.g., an LED, a laser, and so forth) and an antenna 214. The wireless headphone set 152 includes a photosensitive device 252 (e.g., a phototransistor, a solar cell(s), a SEED (self-optic effect device), and so forth) and an antenna 254. The optical transmitting device 212 and the photosensitive device 252 are used for wireless transmission and reception of optical signals, respectively. The antenna 214 and the antenna 254 are used for wireless transmission and reception of RF signals, respectively.

In the case of wireless optical transmission, the optical transmitting device 212 wirelessly transmits optical (digital) signals to the wireless headphone set 152 by pulsing its light output (e.g., off equals a zero (0) and on equals a one (1)). The photosensitive device 252 in the wireless headphone set 152 detects the optical signals wirelessly transmitted by the optical transmitting device 212.

The wireless headphone set 152 also includes a digital-to-analog converter (DAC) 256 for converting the digital signals into analog signals. The analog signals are then provided to a left channel speaker 282 and a right channel speaker 284 either directly or after processing by another

signal processing/conversion facilities 197. For example,  
in the latter case, the DAC 256 may simply convert the  
wireless digital signal to a composite analog signal, which  
is then separated by the other signal processing/conversion  
5 facilities 197 into right and left audio channels (when the  
DAC 256 is separate from the signal processing/conversion  
facilities 197). Other processing by the signal  
processing/conversion facilities 197 may include, for  
example, filtering of the analog signals.

10 It is to be appreciated that different frequencies may  
be used for right channels and left channels. For example,  
as shown in FIG. 1A, the wireless headphone set 152 receives  
a left channel audio signal corresponding to 2.3MHz and a  
right channel audio signal corresponding to 2.8 MHz, while  
15 the wireless headphone set 154 receives a left channel audio  
signal corresponding to 2.5MHz and a right channel audio  
signal corresponding to 3.0 MHz. Such an arrangement allows  
for more than one wireless headphone set to be actively used  
without frequency interference therebetween. Given the  
20 teachings of the invention provided herein, one of ordinary  
skill in the related art will contemplate these and other  
approaches for facilitating wireless transmission between  
the wireless transmitters 128, 130 and the wireless

headphone sets 152, 154 while maintaining the spirit and scope of the invention.

It is to be appreciated that a processor 276 may be used to control the functions of the DAC 256 and the signal processing/conversion facilities 197. It is to be further appreciated that the DAC 256 may be separate from (as shown) or part of the signal processing/conversion facilities 197.

The preceding description regarding the functions of the DAC 256 and the signal processing/conversion facilities 197 may also be applied in the case of RF transmission. In such a case, the transmission and reception functions of the optical transmitting device 212 and the photosensitive device 252 are replaced by those of the antennas 214 and 254, respectively. That is, the antenna 214 is used to wirelessly transmit an RF signal which is then received by the antenna 254. A modulator/demodulator may be included or associated with the antennas 214 and 254 to perform such functions as are known to one of ordinary skill in the related art.

Given the teachings of the invention provided herein, one of ordinary skill in the related art will contemplate these and other optical transmitting devices, photosensitive devices, and configurations of the elements of the invention



which allow for the transmission and reception of any type of wireless signal (e.g., analog and digital) and appropriate processing/conversion to facilitate reproduction of the content of the wireless signals provided by the wireless transmitters 128, 130.

The preceding description of the display device 112 has primarily focused on features that may be included in the display device 112 to enhance the operation thereof. A description of mounting arrangements for the display device 112 will now be given.

FIG. 3 is a block diagram illustrating a display device 312 for a vehicle according to an illustrative embodiment of the invention. FIG. 3 is shown with the minimum number of elements, so that the mounting arrangement of the display device is emphasized. In particular, the display device 312 is mounted on the rear of a seat of the vehicle.

The display device 312 includes the first wireless transmitter 128, the second wireless transmitter 130, and the receiver 125. Also shown with a dashed line is the wireless transmitter 510, which may be employed in embodiments of the invention which implement CDMA technology. The following description, however, will be directed to the first and the second wireless transmitters

128, 130. The video and audio signals from the input devices 190 are provided to the display device 112 through the receiver 125. In a preferred embodiment, the receiver 125 includes separate inputs for video signals and audio signals. Of course, other arrangements are possible, including, but not limited to, inputs for receiving composite video and audio signals, or altogether separate buses for video and audio, which corresponding processing circuitry for each.

It is to be appreciated that while the display device 312 is shown to include two wireless transmitters (128, 130), any number of wireless transmitters may be employed including only one wireless transmitter. It is to be further appreciated that the locations of the wireless transmitters 128, 130 in FIG. 3 are merely illustrative. Such transmitters (including the case when only one transmitter is used) may be located anywhere on or in the display device. For example, a transmitter(s) may be located on the top, bottom, side, front, or rear of the display device. The transmitter may be flush, fully or partial protruding with respect to one or more surfaces of the display devices. Given the teachings of the invention provided herein, one of ordinary skill in the related art

will contemplate these and various other locations and configurations of the wireless transmitters that are employed by the display device.

Associated with the display device 312 of FIG. 3 are the first wireless headphone set 152 and the second wireless headphone set 154 (not shown), which receive wireless signals from the first wireless transmitter 128 and the second wireless transmitter 130, respectively.

Although the illustrative embodiments have been described herein with reference to the accompanying drawings, it is to be understood that the present system and method is not limited to those precise embodiments, and that various other changes and modifications may be affected therein by one skilled in the art without departing from the scope or spirit of the invention. All such changes and modifications are intended to be included within the scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A display device for a vehicle having a seat,  
comprising:

5 an assembly housing adapted to mount at a rear portion  
of the seat;

a receiver adapted to receive at least one of video and  
audio signals from at least one external input device; and

10 at least one wireless transmitter operatively coupled  
to said receiver, adapted to wirelessly transmit the audio  
signals to at least one wireless headphone set, wherein said  
display device is adapted to reproduce the video signals.

15 2. The display device according to claim 1, wherein  
the wireless signals are at least one of radio frequency and  
infrared signals.

20 3. The display device according to claim 1, wherein  
said receiver receives an input signal from an external  
media source.

4. The display device according to claim 3, wherein  
the external media source includes at least one of a

television tuner, a video cassette player (VCP), a compact disk (CD) player, a digital video disk (DVD) player, an AM/FM radio, a video game player, global navigation data, and e-mail.

5

5. The display device according to claim 1, further comprising signal processing facilities adapted to perform at least one of signal processing and signal conversion, with respect to at least one of the audio signals and the video signals.

10

6. The display device according to claim 5, wherein said signal processing facilities are adapted to perform at least one of digital signal processing, encoding, decoding, encrypting, decrypting, compressing, decompressing, analog-to-digital conversion (ADC), digital-to-analog conversion (DAC), and error correction.

15

7. The display device according to claim 1, wherein said display device employs one of a liquid crystal display (LCD), light emitting diodes (LEDs), and a gas plasma.

20

8. The display device according to claim 7, wherein said liquid crystal display is based upon one of active matrix technology and passive matrix technology.

5 9. The display device according to claim 1, wherein said display device employs touch screen technology.

10 10. The display device according to claim 1, wherein said display device includes one of picture-in-picture and split screen capability.

11. The display device according to claim 1, wherein said at least one wireless transmitter comprises at least one multiplexor adapted to select a specific input device whose audio output is to be wirelessly transmitted to the at least one wireless headphone set.

15

12. The display device according to claim 1, wherein said at least one wireless transmitter is adapted to wirelessly transmit the audio signals to the at least one wireless headphone set as a left audio channel and a right audio channel.

20

13. The display device according to claim 12, wherein the left audio channel and the right audio channel correspond to different frequencies.

5 14. The display device according to claim 1, wherein said at least one wireless headphone set comprises a plurality of wireless headphone sets, and said at least one wireless transmitter is adapted to wirelessly transmit the audio signals to each of the plurality of wireless headphone sets as a left audio channel and a right audio channel, each of the channels having a different frequency for each of the plurality of wireless headphone sets.

10 15. The display device according to claim 1, wherein said bus comprises a video bus and an audio bus.

15 16. The display device according to claim 1, wherein said video bus is coupled to said display device and said audio bus is coupled to said at least one wireless transmitter.

20 17. The display device according to claim 1, wherein said at least one wireless transmitter comprises an optical

transmitting device and the at least one wireless headphone set comprises a photosensitive device.

18. The display device according to claim 1, wherein  
5 said at least one wireless transmitter and the at least one wireless headphone set comprise an antenna.

19. The display device according to claim 1, wherein  
10 the at least one wireless headphone set comprises a digital-to-analog converter.

20. The display device according to claim 1, wherein  
15 said at least one wireless transmitter is adapted to transmit the audio signals based on Code-Division Multiple Access (CDMA) technology.

21. The display device according to claim 20, further  
20 comprising signal processing facilities, and wherein at least some CDMA operations are performed by said signal processing facilities.



22. The display device according to claim 20, wherein left audio channels and right audio channels of the audio signals are coded separately.

5           23. The display device according to claim 20, wherein the at least one wireless headphone set comprises a selector for selecting one of a plurality of audio signals for audio reproduction.

10           24. The display device according to claim 20, wherein the at least one wireless headphone set comprises at least one of a Walsh code generator and pseudo random number (PN) sequence generator for decoding the audio signals.

15           25. A display device for a vehicle having a seat, comprising:

an assembly housing adapted to mount at a rear portion of the seat;

20           a video bus adapted to couple video signals from external media sources;

an audio bus adapted to couple audio signals from the external media sources;

a wireless transmitter operatively coupled to said audio bus, adapted to wirelessly transmit the audio signals to a plurality of wireless headphone sets, wherein said display device is adapted to reproduce the video signals.

5

26. A display device for a vehicle having a seat, comprising:

an assembly housing adapted to mount at a rear portion of the seat;

10 a bus adapted to couple at least one of video and audio signals from each of a plurality of external input devices;

a wireless transmitter operatively coupled to said bus, adapted to wirelessly transmit the audio signals to at least one wireless headphone set, wherein said display device is  
15 adapted to reproduce the video signals.

## VEHICLE DISPLAY DEVICE HAVING A WIRELESS TRANSMITTER

### Abstract

There is provided a display device for a vehicle having  
5 a seat. The display device includes an assembly housing  
adapted to mount at a rear portion of the seat. A receiver  
is adapted to receive at least one of video and audio  
signals from at least one external input device. At least  
one wireless transmitter operatively coupled to the  
10 receiver, is adapted to wirelessly transmit the audio  
signals to at least one wireless headphone set. The display  
device is adapted to reproduce the video signals. In some  
embodiments of the invention, the at least one wireless  
transmitter is adapted to transmit the audio signals based  
15 on Code-Division Multiple Access (CDMA) technology.

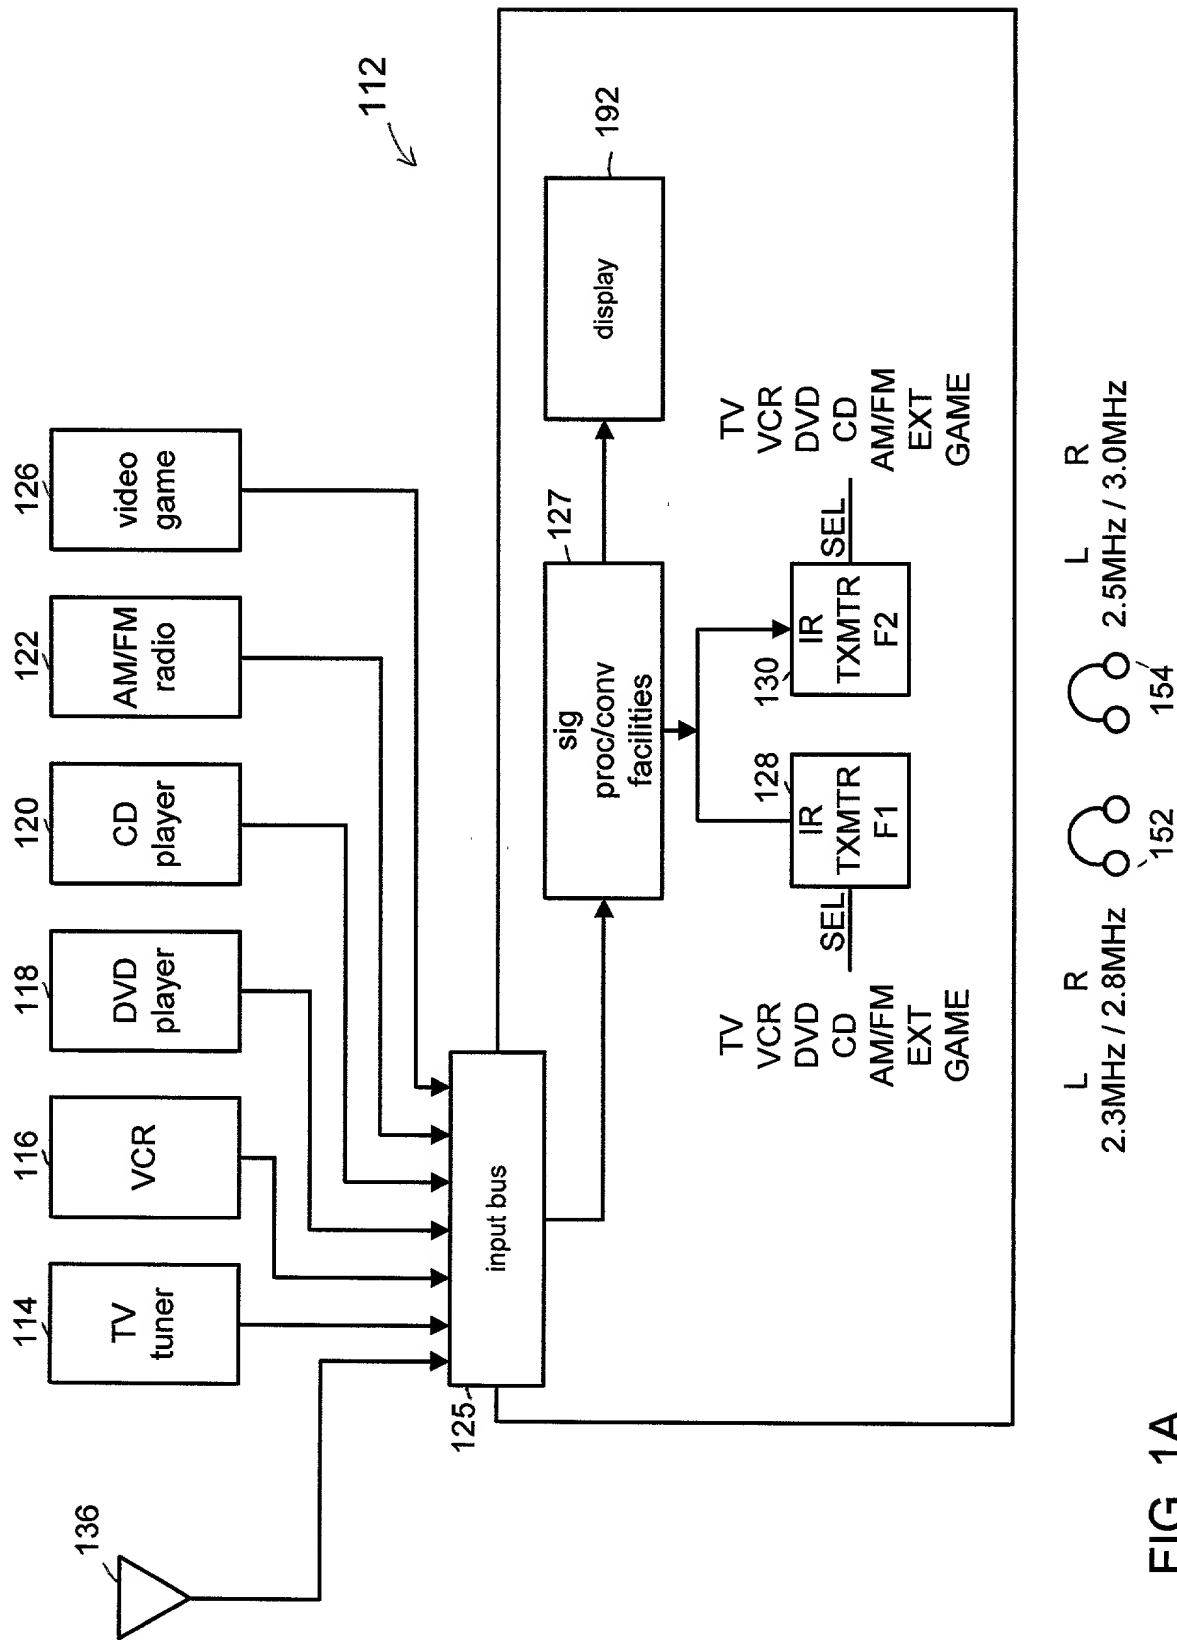


FIG. 1A

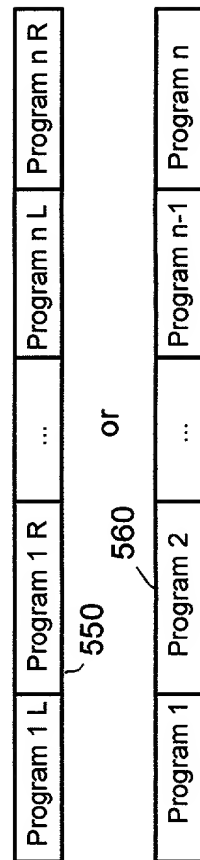
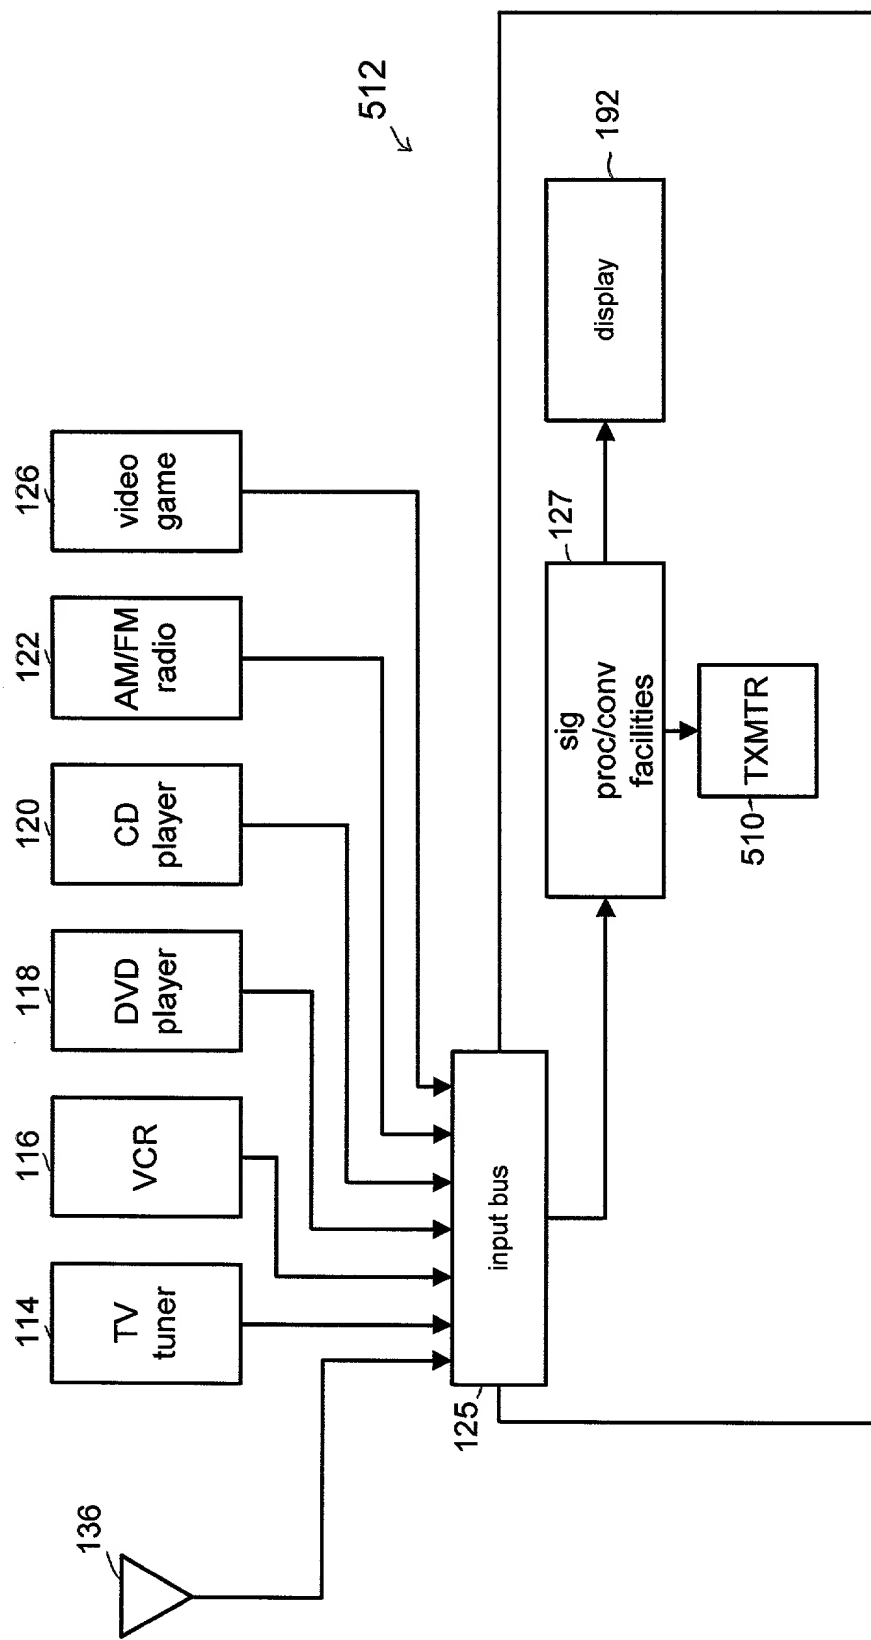



FIG. 1B




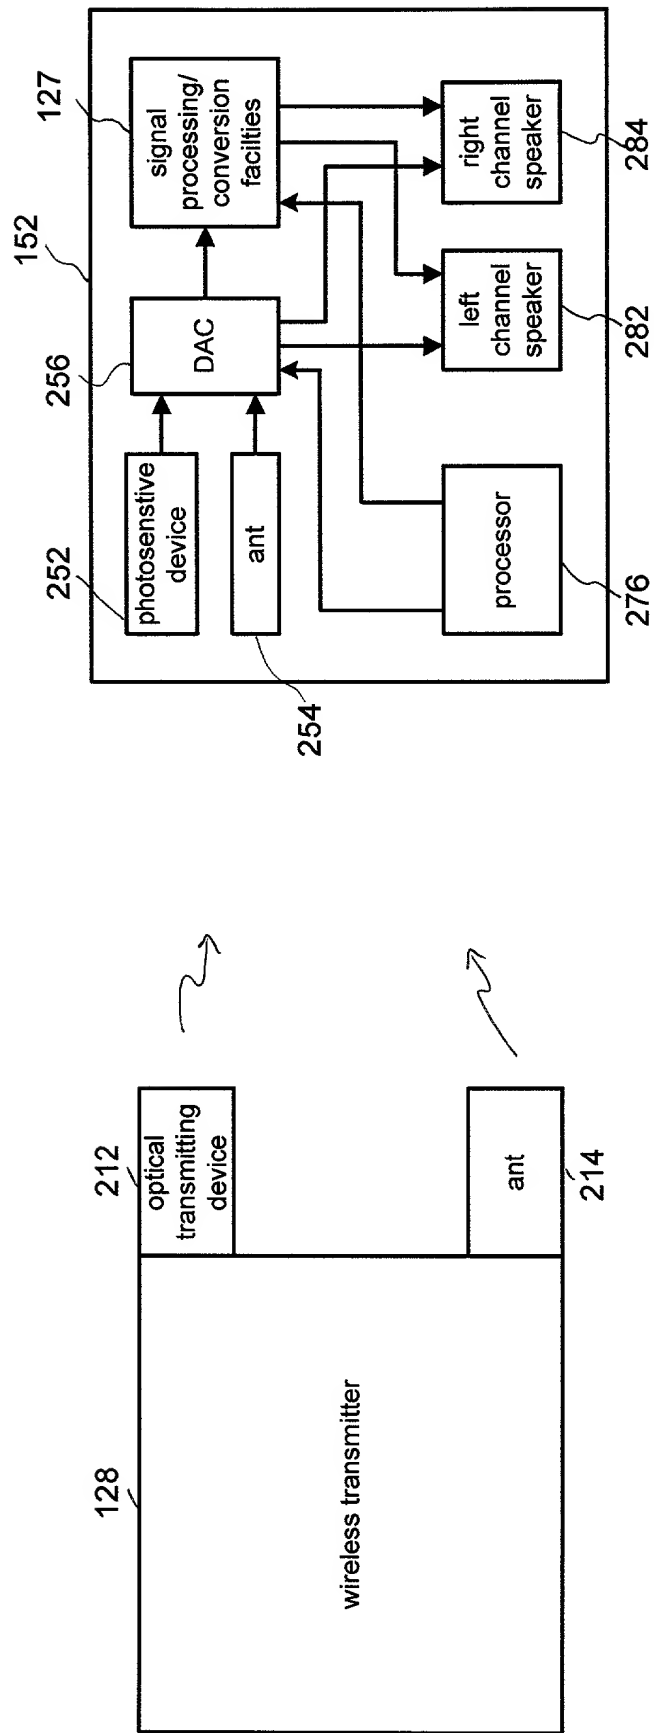


FIG. 2

312 ↘

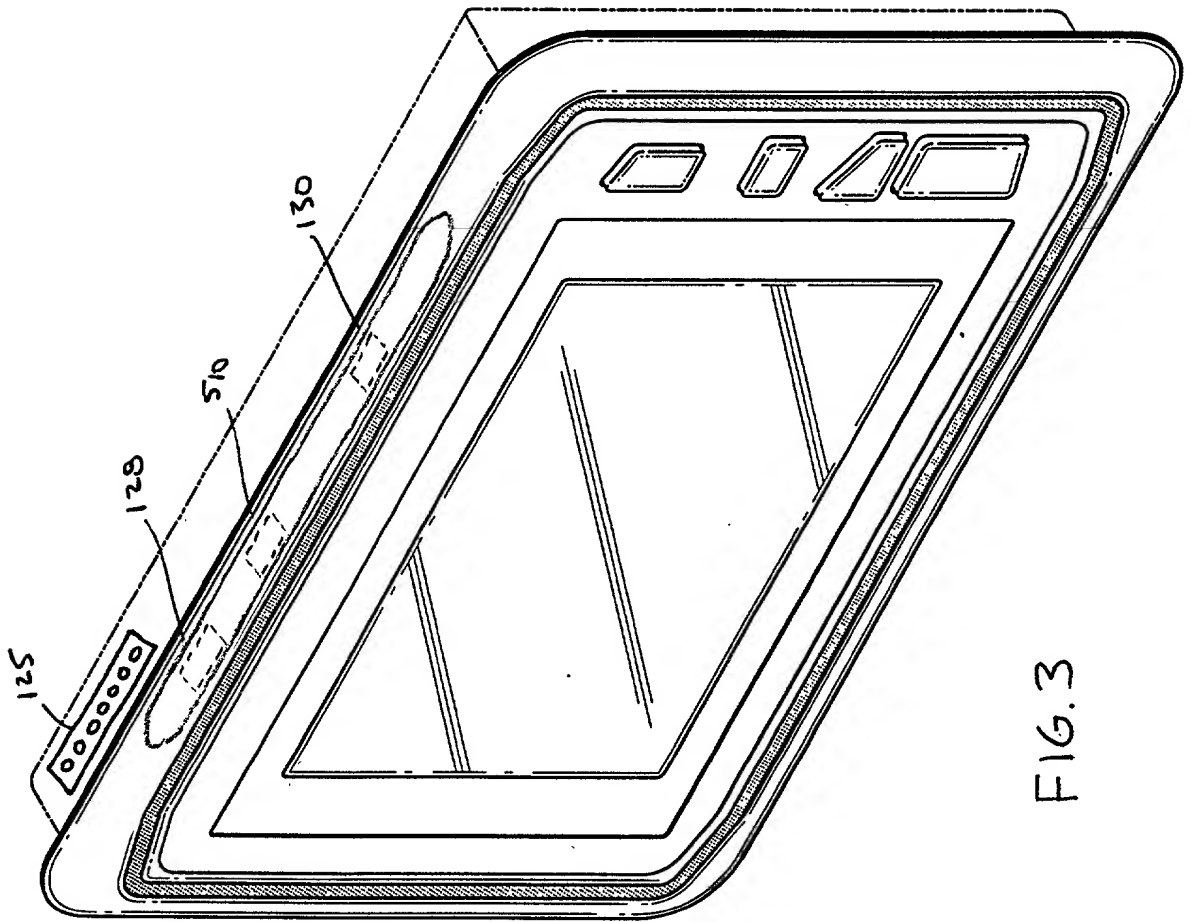

F16.3

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (*if only one name is listed below*), or an original, first and joint inventor (*if plural names are listed below*), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TITLE: VEHICLE DISPLAY DEVICE HAVING A WIRELESS TRANSMITTER**

the specification of which either is attached hereto or indicates an attorney docket no. 8002A-29, or:

☐ was filed in the U.S. Patent & Trademark Office on \_\_\_\_\_ and assigned Serial No. \_\_\_\_\_,

☐ and (*if applicable*) was amended on \_\_\_\_\_,

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, or §119(e) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**Priority Claimed:**

Yes [ ] No [ ]

(Application Number) (Country) (Day/Month/Year filed)

Yes [ ] No [ ]

(Application Number) (Country) (Day/Month/Year filed)

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial Number) (Filing Date) (STATUS: patented, pending, abandoned)

(Application Serial Number) (Filing Date) (STATUS: patented, pending, abandoned)

I hereby appoint the following attorneys: **FRANK CHAU**, Reg. No. 34,136; and **JAMES J. BITETTO**, Reg. No. 40,513; **FRANK V. DeROSA**, Reg. No. 43,584; **GASPARE J. RANDAZZO**, Reg. No. 41,528; and **SUSAN PAIK**, Reg. No. 46,347, each of them of **F. CHAU & ASSOCIATES, LLP**, 1900 Hempstead Turnpike, Suite 501, East Meadow, New York 11554 to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Frank Chau, Esq.  
F. CHAU & ASSOCIATES, LLP  
1900 Hempstead Turnpike, Suite 501  
East Meadow, New York 11554  
Area Code: 516-357-0091



[illegible]

SOLE INVENTOR: Patrick M. L...

*Patrick M. L...*

Address: 49 Sunset Drive, Sayville

Date: 10/26/00

Address: 49 Sunset Dr

*Thom P. Hall*  
12 White Birch Circle, Miller Pl

Date: 10/26/08

Address: 12 White Birch Circle, Miller Place, NY 11762



Date: 26 Oct 02

ess: 7 Serene Court, Dix Hill